

## design features

- ✓ Heavy duty stainless steel.
- ✓ Thick polycarbonate safety shields.
- ✓ Fluted or plain tapered tubes.
- ✓ Direct reading metric and English system scales.
- ✓ Unique design facilitates ease of maintenance cleaning processes.

Heavy-duty flow meters are fully enclosed in a brushed stainless steel case. Ideal for industrial applications with flow rates of up to 116 GPM / 440 L/min and 250 SCFM / 7080 L/min. Used for flow measurements of liquids (water) and gases (air).



Meters are graduated for direct reading of water and air. Flow meters come with FNPT or flanged end fittings for easy in-line installation. Wetted parts include borosilicate glass flow tubes, Viton® o-rings, and 316 Stainless steel fittings, guide rods, floats and float stops.

Flanged  
M Style Meter



In Line  
M Style Meters


### SPECIFICATIONS

<b>ACCURACY</b>	±3% of full scale.
<b>MINIMUM FLOW RATE</b>	Approximately 10% of maximum flow rate.
<b>REPEATABILITY</b>	±0.5% of full scale.
<b>MAXIMUM PRESSURE AT 200°F (93°C)</b>	200 psig / 13.6 bar gauge (tube size 3, 4, 5 and 6). 125 psig / 8.5 bar gauge (tube size 8 and 9).
<b>MAXIMUM OPERATING TEMPERATURE</b>	200 °F (93 °C).

### \*\*MATERIALS OF CONSTRUCTION


<b>FLOW TUBES</b>	Heavy walled borosilicate glass.
<b>FITTINGS IN CONTACT WITH FLUIDS</b>	316 Stainless Steel.
<b>FRONT SHIELD</b>	Thick clear polycarbonate and white acrylics.
<b>O-RINGS</b>	Viton®.
<b>OPTIONAL</b>	PTFE/ Kalrez®, EPR.
<b>CONNECTIONS</b>	IN LINE: 1/2", 1-1/2", 2", NPT. 150 ANSI FLANGED: 3/4", 1-1/2", 2-1/2".

*\*\*The selection of materials of construction, is the responsibility of the customer. The company accepts no liability.*

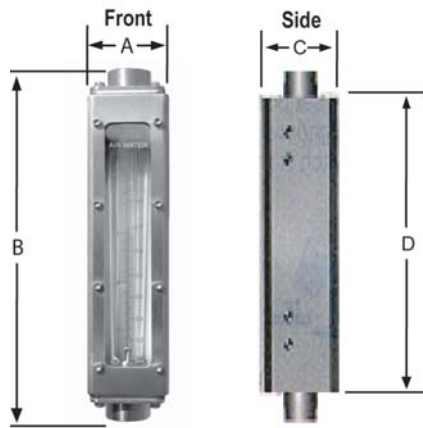

**DIMENSIONS FOR IN-LINE M STYLE METERS**

NPT (F)	A	B	C	D
1/2"	2	9.54	2.25	8.04
1"	3.5	13.69	3.75	10.50
2"	5	15.59	5.25	11.55

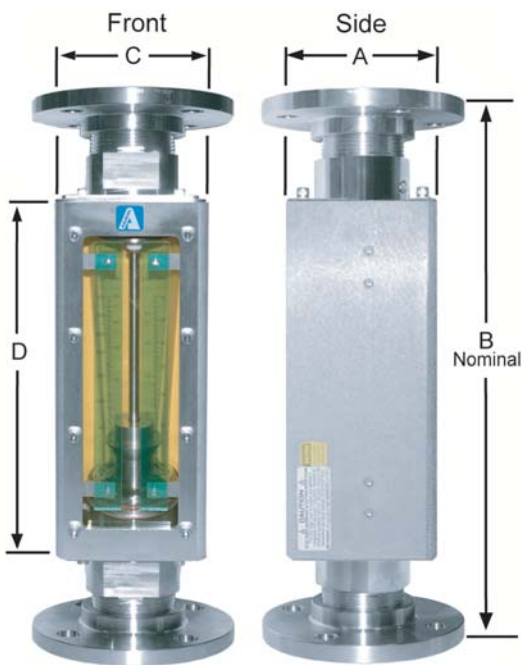

**DIMENSIONS FOR FLANGED M STYLE METERS**

FLANGE SIZE	A	B (Nominal)	C	D
3/4"	2	9.58	2.25	8.04
1 1/2"	3.5	14.15	3.75	10.50
2 1/2"	5	17.98	5.25	11.55

**IN LINE M STYLE METERS**

CATALOG NUMBER	MAX FLOW RATE				PRESSURE DROP ("OF H <sub>2</sub> O)	TUBE SIZE	NPT CONNECTION
	WATER [GPM]	AIR [SCFM]	WATER [L/min]	AIR [L/min]			
MS-VJ-M01-02-ST	0.25	1.2	.95	35	-	3	1/2"
MS-VJ-M02-02-ST	0.36	1.7	1.3	50	2	3	
MS-VJ-M03-02-ST	0.76	3.3	3.0	90	5	3	
MS-VJ-M04-02-ST	1.0	4.2	3.7	120	6	4	
MS-VJ-M05-02-ST	1.5	6.5	5.6	180	-	4	
MS-VJ-M06-02-ST	2.2	8.5	8.2	250	10	4	
MS-VK-M07-02-ST	3.8	16	14	475	10	5	1"
MS-VK-M08-02-ST	5.0	21.5	18	650	14	5	
MS-VK-M09-02-ST	6.0	25.5	20	725	5	6	
MS-VK-M10-02-ST	7.4	30	27.5	900	6	6	
MS-VK-M11-02-ST	9.6	40	35	1200	10	6	
MS-VK-M12-02-ST	11	47.5	40	1400	13	6	
MS-VK-M13-02-ST	14	62	50	1800	24	6	2"
MS-VK-M14-02-ST	20	90	75	2600	39	6	
MS-VL-M15-02-ST	22	90	83	2550	16	8	2"
MS-VK-M16-02-ST	26	-	98	-	70	6	
MS-VQ-M17-02-ST	41	160	155	4531	5	9	
MS-VL-M18-02-ST	44	180	167	5098	30	8	
MS-VQ-M19-02-ST	60	245	227	6938	16	9	
MS-VL-M20-02-ST	61	250	231	7080	40	8	
MS-VQ-M21-02-ST	86	-	326	-	25	9	9
MS-VQ-M22-02-ST	116	-	439	-	45		

**FLANGED M STYLE METERS**

CATALOG NUMBER	MAX FLOW RATE				PRESSURE DROP ("OF H <sub>2</sub> O)	TUBE SIZE	FLANGE CONNECTION
	WATER [GPM]	AIR [SCFM]	WATER [L/min]	AIR [L/min]			
MS-VR-M01-02-ST	0.25	1.2	.95	35	-	3	3/4"
MS-VR-M02-02-ST	0.36	1.7	1.3	50	2	3	
MS-VR-M03-02-ST	0.76	3.3	3.0	90	5	3	
MS-VR-M04-02-ST	1.0	4.2	3.7	120	6	4	
MS-VR-M05-02-ST	1.5	6.5	5.6	180	-	4	
MS-VR-M06-02-ST	2.2	8.5	8.2	250	10	4	
MS-VS-M07-02-ST	3.8	16	14	475	10	5	1 1/2"
MS-VS-M08-02-ST	5.0	21.5	18	650	14	5	
MS-VS-M09-02-ST	6.0	25.5	20	725	5	6	
MS-VS-M10-02-ST	7.4	30	27.5	900	6	6	
MS-VS-M11-02-ST	9.6	40	35	1200	10	6	
MS-VS-M12-02-ST	11	47.5	40	1400	13	6	
MS-VS-M13-02-ST	14	62	50	1800	24	6	2 1/2"
MS-VS-M14-02-ST	20	90	75	2600	39	6	
MS-VT-M15-02-ST	22	90	83	2550	16	8	2 1/2"
MS-VS-M16-02-ST	26	-	98	-	70	6	
MS-VU-M17-02-ST	41	160	155	4531	5	9	
MS-VT-M18-02-ST	44	180	167	5098	30	8	
MS-VU-M19-02-ST	60	245	227	6938	16	9	
MS-VT-M20-02-ST	61	250	231	7080	40	8	
MS-VU-M21-02-ST	86	-	326	-	25	9	9
MS-VU-M22-02-ST	116	-	439	-	45		